

T5 Integrated Tube/Fixture

Summary-

Good color uniformity, high grade pc cover with light transmittance up to 95%, 1mm thickness Oxidation housign with good heat dissipation performance. Internal driver with overload and short circuit protection. High intensity brightness. Good for new and retrofit projects

Application



BT5U040-IT12F30-A5NW

These LED fixtures are ideal for Interior architectural and commercial applications, they can be mounted flush or hanging (hardware supplied)

Specifications

BT5U040-IT30F08-A5ND

BT5U040-IT60F15-A5ND

BT5U040-IT90F24-A5ND

BT5U040-IT12F30-A5ND

Dimension	0.3M/1Ft(297*45*36mm)	0.6M/2Ft(566*45*36mm)	.9M/3Ft(870*45*36mm)	1.2M/4Ft(1166*45*36mm)
LED Source	SMD3014	SMD3014	SMD3014	SMD3014
Power	8W	15W	24W	30W
Energy Consumptio	8W	15W	24W	30W
Luminous Flux	800lm	1500lm	2400 lm	3000 lm
Bean Angle	120°	120°	120°	120°
Color Temperature	3000/4000/5000/6500K	3000/4000/5000/6500K	3000/4000/5000/6500K	3000/4000/5000/6500K
Input Voltage	120-277VAC 50/60Hz	120-277VAC 50/60Hz	120-277VAC 50/60Hz	120-277VAC 50/60Hz
LED Lifetim	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
IP Rating	IP20	IP20	IP20	IP20
Operatin Temperature	-10°C ~ 40°C	-10°C ~ 40°C	-10°C ~ 40°C	-10°C ~ 40°C
Installation	Flush or Hanging	Flush or Hanging	Flush or Hanging	Flush or Hanging
Fixture Material	Aluminum/PC	Aluminum/PC	Aluminum/PC	Aluminum/PC
Certification	ETL	ETL	ETL	ETL

Contact us for many other sizes and power ratings available in this series.

T5 Integrated Tube/Fixture


BT5U040-IT15F40-A5ND

BT5U040-IT18F44-A5ND



BT5U040-IT24F60-A5ND

Dimension	1.5M/5Ft(1500*45*36mm)	1.8M/6Ft(1800*45*36mm)	2.4M/8Ft(2301*45*36mm)
LED Source	SMD3014	SMD3014	SMD3014
Power	40W	44W	60W
Dimming	Optional	Optional	Optional
Luminous Flux	4,000 lm	4,400 lm	6,000 lm
Beam Angle	120°	120°	120°
Color Temperature	3000/4000/5000/6500K	3000/4000/5000/6500K	3000/4000/5000/6500K
Input Voltage	120-277Vac 50/60Hz	120-277Vac 50/60Hz	120-277Vac 50/60Hz
LED Lifetime	50,000 Hours	50,000 Hours	50,000 Hours
IP Rating	IP20	IP20	IP20
Operatin Temperature	-10°C ~ 40°C	-10°C ~ 40°C	-10°C ~ 40°C
Installation	Flush or Hanging	E39, E40, E26 Optional	E39, E40, E26 Optional
Fixture Material	Aluminum/PC	Aluminum/PC	Aluminum/PC
Certification	ETL	ETL	ETL

T8 integrated LED tube light & corner light

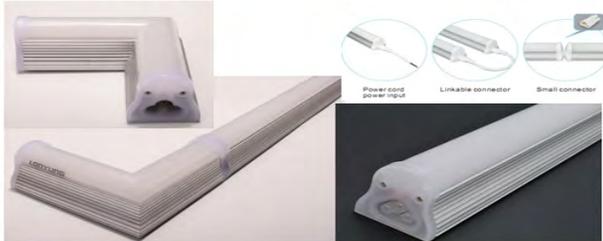

T5 integrated Double LED tube light & corner light

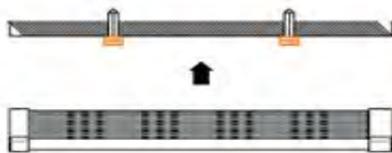

Connection drawing

