

Project Name	
Project #	
Model #	
Type	

## BT8-U040-INTEGRATED LED SERIES

### FEATURES & SPECIFICATIONS

The BT8-U040-IT series is provide good color uniformity, with a high grade pc cover with light transmittance up to 95%, 1mm thickness anti-oxidation housign with good heat dissipation performance.

Internal driver with overload and short circuit protection. High intensity brightness. Good for new and retrofit projects

**Installation:** These fixtures are an excellent choice for hallways, offices, coves, walls, etc

**Rating:** IP20

**Warranty:** 5 years

**Listings:** ETL

**Beam Angle:** 120°

**CRI:** >70

**Fixture Body:** Aluminum with polycarbonate lens

**Dimensions:**

- 2FT: 22 29/32 x 1 37/64 x 1 21/32
- 3FT: 34 31/64 x 1 37/64 x 1 21/32
- 4FT: 46 59/64 x 1 37/64 x 1 21/32
- 5FT: 58 25/32 x 1 37/64 x 1 21/32
- 6FT: 69 3/32 x 1 37/64 x 1 21/32
- 8FT: 93 15/64 x 1 37/64 x 1 21/32


#### T8 Integrated LED Tube Light



T8 integrated LED tube light & corner light



T5 integrated Double LED tube light & corner light

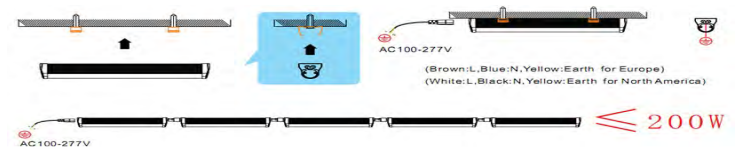

## ORDERING INFORMATION

## EX: BT8-U040-IT8-40-UNV-FRT-DM

Series	Wattage (Lumens)	Input Voltage	Temperature	Lens	Dimming	Mounting Hardware
1a. BT8-U040-IT2	09 (09W; 900lm)	2a. UNV	3a. 27K (2700K)	4a. FRT	5a. DM	6a. Included
1b. BT8-U040-IT3	13 (13W; 1,300lm)		3b. 30K (3000K)		5b. Blank	
1c. BT8-U040-IT4	22 (22W; 2,200lm)		3c. 40K (4000K)			
1d. BT8-U040-IT5	25 (25W; 2,500lm)		3d. 50K (5000K)			
1e. BT8-U040-IT6	28 (28W; 2,800lm)		3e. 60K (6000K)			
1f. BT8-U040-IT3	40 (13W; 4,000lm)					

Notes:

\*If you do not see an option you would like please inquire directly and we will work to accommodate your needs.\*

3a. 100 - 277V input voltage 5a. Black

\*All of the products and specifications can change without prior notice\*

\*Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes\*