

T8 Integrated LED Tube Light

T8 Integrated Tube/Fixture

Summary-

Good color uniformity, high grade pc cover with light transmittance up to 95%, 1mm thickness Oxidation housign with good heat dissipation performance. Internal driver with overload and short circuit protection. High intensity brightness. Good for new and retrofit projects

Application



BT8U040-IT12F22-A5NW

These LED fixtures are ideal for Interior architectural and commercial applications, they can be mounted flush or hanging (hardware supplied)

Specifications

Specifications	BT8U040-IT60F09-A5ND	BT8U040-IT90F13-A5ND	BT8U040-IT12F18-A5ND	BT8U040-IT12F22-A5ND
Dimension	0.6M/2Ft(582*40*42mm)	0.9M/3Ft(888*40*42mm)	1.2M/4Ft(1192*40*42mm)	1.2M/4Ft(1192*40*42mm)
LED Source	SMD3014	SMD3014	SMD3014	SMD3014
Power	9W	13W	18W	22W
Luminous Flux	900lm	1,300lm	1,800 lm	2,200 lm
Bean Angle	120°	120°	120°	120°
Dimming	Optional	Optional	Optional	Optional
Color Temperature	3000/4000/5000/6500K	3000/4000/5000/6500K	3000/4000/5000/6500K	3000/4000/5000/6500K
Input Voltage	120-277VAC 50/60Hz	120-277VAC 50/60Hz	120-277VAC 50/60Hz	120-277VAC 50/60Hz
LED Lifetim	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
IP Rating	IP20	IP20	IP20	IP20
Operatin Temperature	-10°C ~ 40°C	-10°C ~ 40°C	-10°C ~ 40°C	-10°C ~ 40°C
Installation	Flush or Hanging	Flush or Hanging	Flush or Hanging	Flush or Hanging
Fixture Material	Aluminum/PC	Aluminum/PC	Aluminum/PC	Aluminum/PC
Certification	ETL	ETL	ETL	ETL

Contact us for many other sizes and power ratings available in this series.

T8 Integrated Tube/Fixture




BT8U040-IT15F25-A5ND BT8U040-IT18F28-A5ND BT8U040-IT24F36-A5ND BT8U040-IT24F44-A5ND

Dimension	1.5M/5Ft(1493*40*42mm)	1.8M/6Ft(1755*40*42mm)	2.4M/8Ft(2368*42*42mm)	2.4M/8Ft(2368*42*42mm)
LED Source	SMD3014	SMD3014	SMD3014	SMD3014
Power	25W	28W	36W	44W
Luminous Flux	2,500 lm	2,800 lm	3,600 lm	4,400 lm
Beam Angle	120°	120°	120°	120°
Dimming	Optional	Optional	Optional	Optional
Color Temperature	3000/4000/5000/6500K	3000/4000/5000/6500K	3000/4000/5000/6500K	3000/4000/5000/6500K
Input Voltage	120-277Vac 50/60Hz	120-277Vac 50/60Hz	120-277Vac 50/60Hz	120-277Vac 50/60Hz
LED Lifetime	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
IP Rating	IP20	IP20	IP20	IP20
Operatin Temperature	-10°C ~ 40°C	-10°C ~ 40°C	-10°C ~ 40°C	-10°C ~ 40°C
Installation	Flush or Hanging	Flush or Hanging	Flush or Hanging	Flush or Hanging
Fixture Material	Aluminum/PC	Aluminum/PC	Aluminum/PC	Aluminum/PC
Certification	ETL	ETL	ETL	ETL

T8 integrated LED tube light & corner light



T5 integrated Double LED tube light & corner light

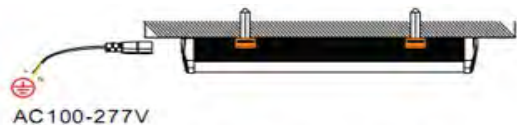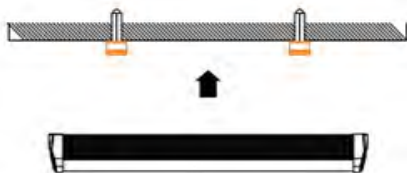

(Brown:L,Blue:N,Yellow:Earth for Europe)
(White:L,Black:N, Yellow: Earth for North America)



≤ 200W