


Project Name	
Project #	
Model #	
Type	

FBA-U033-ST LED Series

FEATURES & SPECIFICATIONS

The FBA-ST LED Strip Light is mainly for commercial use. This strip light can be used in warehouses, offices, garages, retail shops, and other commercial applications.

- CRI more than 80
- Reduces energy consumption up to 60%
- No UV emission
- UL, Lighting Facts and DLC® Premium
- Lumen efficacy is greater than 130 lumen/watt
- Suitable for damp locations
- Espen dimmable driver
- Surface mounting or cable hung installation
- Input voltage can be AC100-277V
- Glass-free
- 5 Year Manufacturer's Warranty
- 2 Year Manufacturer's Warranty on EM Module



Listings: UL


View Angle: 120°

Lifetime: 50,000 hours

Fixture Body: White powder coated steel with a clear polycarbonate, prismatic lens.

Dimension:


- 4FT : 48" L x 3.35" W x 3.56" H
- 8FT: 96" L x 3.35" W x 3.56" H

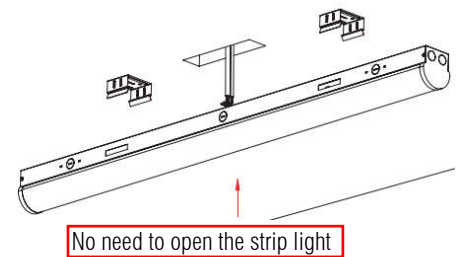

Link Plate



- A - Keyhole Slots for Surface Mounting
- B - Wiring Knockouts
- C - T-Bar Clip Mounting Hole
- D - V-Hook Openings for Chain Mounting



ORDERING INFORMATION

EX: FBA-U033-ST8F-060-UNV-50K-DCD-SM

Series	Wattage (Lumens)	Input Voltage	Temperature	Dimming	Mount	Emergency
1a. FBA-U033-ST4F	2a. 024 (24W; 3,120lm)	3a. 27V	4a. 40K (4000K)	5a. DCD	6a. SM	7a. Blank
1b. FBA-U033-ST8F	2b. 040 (40W; 5,200lm)		4b. 50K (5000K)		6b. HM	7b. EM
	2c. 068 (68W; 8,200lm)					

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

1a. ST4 4ft 1b. ST8 8ft 3a. 100 - 277V input voltage 5a. Leave Blank if not needed 5b. 0-10V Dimming 6a. Surface (standard) 6b. Hanging 7a. Leave Blank if not needed. 7b. 90 Minute Emergency Pack

**4ft Available in 24W & 40W, 8ft Available in 40W & 64W *All of the products and specifications can change without prior notice*

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

1834 NW 21st STREET MIAMI, FL 33142 | PHONE - 786.420.3600 | FAX - 786.420.3602 | SPECTRASOL-US.COM