

Project Name	
Project #	
Model #	
Type	

## Bollard Light Series


### FBL-U004-OGLB00A

#### Features

- Features a combination of security, style and vandal resistance that lightens pathways beautifully. Special heat dissipation design to achieve optimum efficiency.
- High-shock and high-vibration resistant. Color temperature offering of 3000K(Warm White), 4000K(Natural White) and 5000K(Cool White).
- Green, energy saving, long and reliable life of 50,000 hours.
- Conforms to the strictest approval standards. ETL approved for wet or damp locations.
- Application: Main road, Rural road, commercial square, Garden, Villa, etc...

#### Advantage

- Easy and secure installation
- Ideal for Harsh Environment Applications
- Uniformity lighting distribution
- High lumens efficiency and high CRI
- Environmentally friendly with no mercury

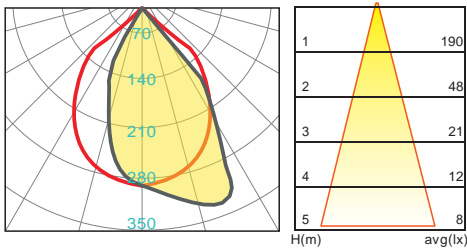

#### Description

Die-cast Aluminum housing  
Extruded Aluminum pole


#### Basic Feature

No: OGLB00A-6W LED  
Lumileds LED 6W  
Clear PC  
53.6°  
Class I, IP54


#### Light Distribution



#### Dimension

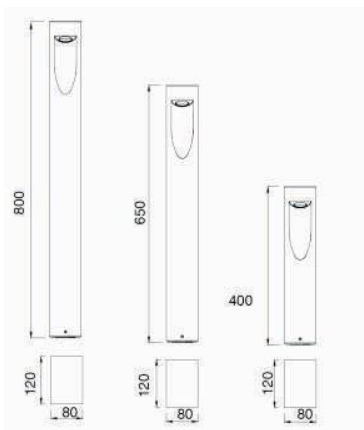

OGLB00A-800 OGLB00A-650 OGLB00A-400

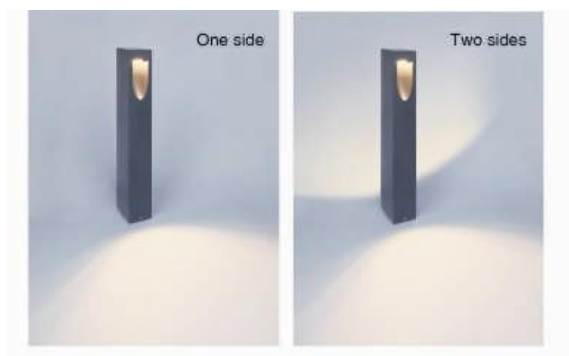

OGLB00A-6W LED

OGLB00A-2\*6W LED



\*Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes\*

\*All of the products and specifications can change without prior notice\*