

Project Name	
Project #	
Model #	
Type	

Bollard Light Series FBL-U004-OGLB01B


Features

- Features a combination of security, style and vandal resistance that lightens pathways beautifully. Special heat dissipation design to achieve optimum efficiency.
- High-shock and high-vibration resistant. Color temperature offering of 3000K(Warm White), 4000K(Natural White) and 5000K(Cool White).
- Green, energy saving, long and reliable life of 50,000 hours.
- Conforms to the strictest approval standards. ETL approved for wet or damp locations.
- Application: Main road, Rural road, commercial square, Garden, Villa, etc...

Advantage

- Easy and secure installation
- Ideal for Harsh Environment Applications
- Uniformity lighting distribution
- High lumens efficiency and high CRI
- Environmentally friendly with no mercury

Light Distribution

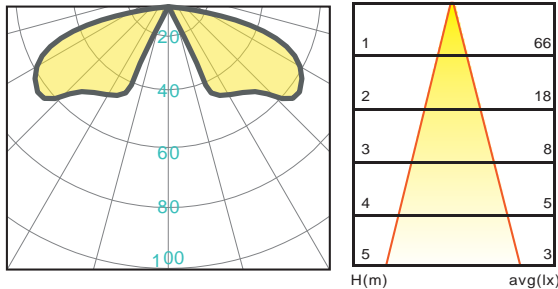



Description

Die-cast Aluminum housing
Extruded Aluminum pole

Basic Feature

No: OGLB01A/OGLB01B/OGLB01C
Everlite LED 10W
E26, Max. 23W PLC
Opal PC
Class I, IP65

Dimension

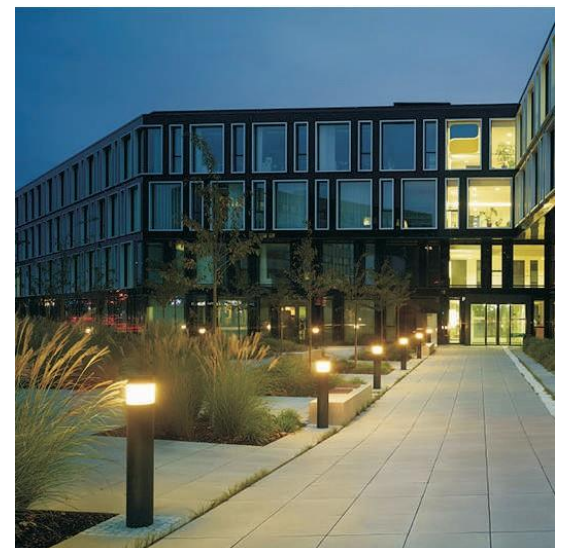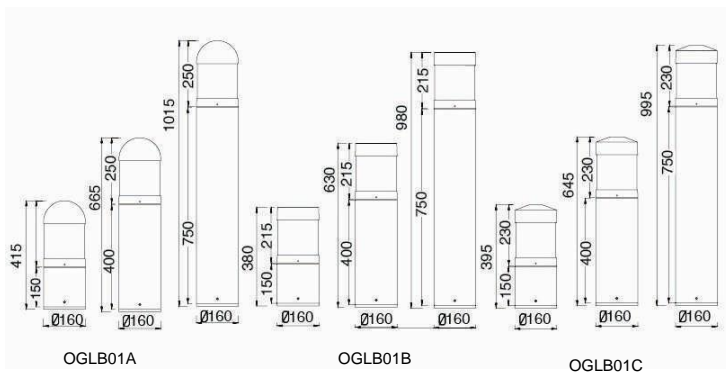

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

All of the products and specifications can change without prior notice