

Project Name	
Project #	
Model #	
Type	

## Bollard Light FBL-U004-OGLB03 Series

### Features

- Features a combination of security, style and vandal resistance that lightens pathways beautifully. Special heat dissipation design to achieve optimum efficiency.
- High-shock and high-vibration resistant. Color temperature offering of 3000K(Warm White), 4000K(Natural White) and 5000K(Cool White).
- Green, energy saving, long and reliable life of 50,000 hours.
- Conforms to the strictest approval standards. ETL approved for wet or damp locations.
- Application: Main road, Rural road, commercial square, Garden, Villa, etc...

### Advantage

- Easy and secure installation
- Ideal for Harsh Environment Applications
- Uniformity lighting distribution
- High lumens efficiency and high CRI
- Environmentally friendly with no mercury





### Description

Die-cast Aluminum housing  
Extruded Aluminum pole


### Basic Feature

No: OGLB03A/OGLB03B/  
OGLB03C Everlite LED 10W/20W,  
Lumileds LED 30W Clear  
PC  
Class I, IP65

### Light Distribution



### Dimensions

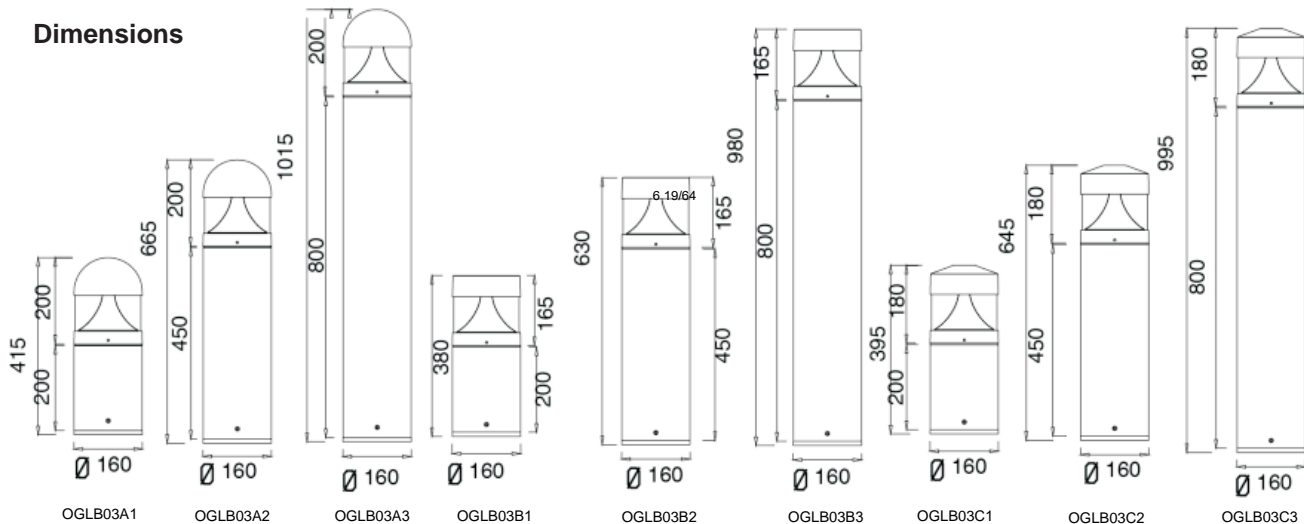

Dimensions	OGLB03A	OGLB03B	OGLB03C
WIDE	6 19/64	6 19/64	6 19/64
HIGH	1	16 11/32	15 35/64
	2	26 3/16	24 25/64
	3	39 31/64	39 11/64