

Project Name	
Project #	
Model #	
Type	

FCP-U021-AST LED Series

FEATURES & SPECIFICATIONS

Intended Use: The AST series is an excellent choice for powerful and energy efficient lighting. These fixtures are made with die-cast aluminum bodies anodized with a bronze finish, a polycarbonate lens, and High Quality chips. The finish product has a refined and modern look with efficient LED technology to keep energy costs down while still providing excellent and long lasting lighting.

Installation: These luminaries are ideal for exterior architectural and commercial applications. They are designed for illuminating spaces adjacent to walls, such as pathways, walkways, courtyards, tunnels, garages, docks, bridges, parkways, gazebos, and gardens.

Rating: Wet location

Warranty: 5 years



Listings: UL & cUL

View Angle: 120°

Lifetime: 50,000 hours

Fixture Body: Powder coated die-cast aluminum with a polycarbonate lens.

Dimensions:

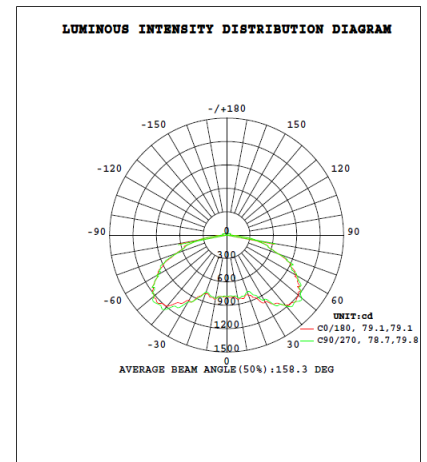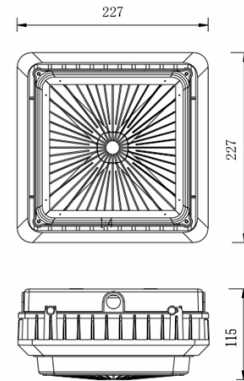

ORDERING INFORMATION

EX: FCP-RP03-040-27V-40K-WHT-CRL-MSN

Series	Wattage (Lumens)	Input Voltage	Temperature	DIM	Lens	Sensor	Finish	Emergency
1a. FCP-U021-AST	2a. 040 (40W; 5,300lm)	3a. 27V	4a. 40K (4000K)	5a. Blank	6a. CRL	7a. (Blank)	8a. WHT	9a. (Blank)
			4b. 45K (4500K)	5b. DM	6b. FRL	7b. MSN		9b. (EM)
			4c. 50K (5000K)					

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

- 3a. 100 - 277V input voltage
- 5a. Leave Blank if not required
- 5b. 0-10Vdc Dimming
- 6a. Clear lens
- 6b. Frosted lens
- 7a. Leave blank if not required
- 7b. Motion Sensor
- 8b. White (Powder Coated)
- 9a. Leave blank if not required
- 9b. 90 Min Emergency

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes