

Project Name	
Project #	
Model #	
Type	

FCP-U066-CP05 LED Series

FEATURES & SPECIFICATIONS

Intended Use: The FCP-CP05 series is an excellent choice for powerful and energy efficient lighting. These fixtures are made with die-cast aluminum bodies anodized with a bronze finish, a polycarbonate lens, and CREE chips. The finish product has a refined and modern look with efficient LED technology to keep energy costs down while still providing excellent and long lasting lighting.

Installation: These luminaries are ideal for exterior architectural and commercial applications. They are designed for illuminating spaces adjacent to walls, such as pathways, walkways, courtyards, tunnels, garages, docks, bridges, parkways, gazebos, and gardens.

Rating: Wet location

Warranty: 5 years


Listings: UL & cUL

View Angle: 120°

Lifetime: 50,000 hours

Fixture Body: Powder coated die-cast aluminum with a polycarbonate lens.

Dimensions:

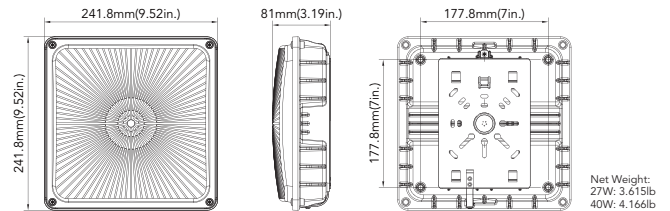

Housing
One piece die cast housing, better waterproofing, suitable for both indoor and outdoor application.

Mounting Bracket
Suitable for J-BOX mounting, and easy for installation, also support pendant mounting, wires coming out from the back for easier wire connections.


PHOTOMETRY
Parking Garage Photometry and polycarbonate optical lens with heat resisting.

1/2inch threaded hole
Support wires coming from the hole for easier wire connections. Optional PIRsensor and Emergency Battery.



PHOTOMETRICS

Parking Garage

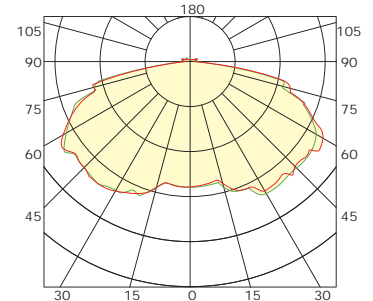

ORDERING INFORMATION EX: FCP-U066-CP04-060-27V-40K-DBR-CRL

Series	Wattage (Lumens)	Input Voltag	Temperature	Finish	Lens	Sensor	Emergency
1a. FCP-U066-CP05	2a. 027 (27W; 3,700lm)	3a. 27V	4a. 40K (4000K)	5a. DBR	6a. CRL	7a. (Blank)	8a. (Blank)
	2b. 040 (40W; 5,400lm)	3a. 48V	4b. 50K (5000K)	5b. WHT	6b. FRL	7b. MSN	8b. EM
	2b. 060 (60W; 8,000lm)				5c. SG		

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

3a. 100-277V input voltage

3b. 347-480V input voltage

5a. Dark Bronze; powder coated

5c. Silver Grey

6a. Clear lens

6b. Frosted lens

7a. Leave blank if not required

7b. Motion sensor

8a. Leave blank if not required

8b. 90 Min EM Pack

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

1834 NW 21ST STREET MIAMI, FL 33142 | PHONE – 786.420.3600 | FAX – 786.420.3602 | SPECTRASOL-US.COM