

Project Name	
Project #	
Model #	
Type	

FCP-GS02/03 LED Series

FEATURES & SPECIFICATIONS

Intended Use: The FCP-GS02/03 series is an excellent choice for powerful and energy efficient lighting. These fixtures are made with die-cast aluminum bodies anodized with a bronze finish, a polycarbonate lens, and PHILIPS chips. The finish product has a refined and modern look with efficient LED technology to keep energy costs down while still providing excellent and long lasting lighting.

Installation: These luminaries are ideal for exterior architectural and commercial applications. They are designed for illuminating gas stations, pathways, walkways, courtyards, tunnels, garages, docks, bridges, parkways, and gazebos.

Rating: IP65

Warranty: 5 years


Listings: UL & cUL

View Angle: 110°


Lifetime: 50,000 hours

Fixture Material: White powder coated die-cast aluminum, Glass Lens

Dimensions:

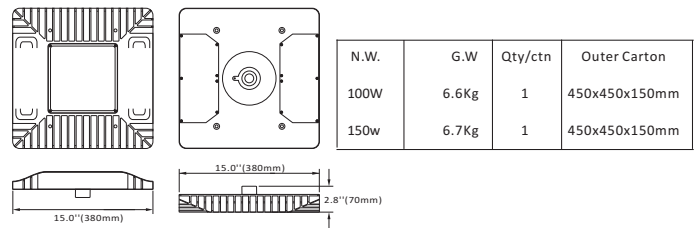

N.W.	G.W.	Qty/ctn	Outer Carton
100W	6.6Kg	1	450x450x150mm
150w	6.7Kg	1	450x450x150mm

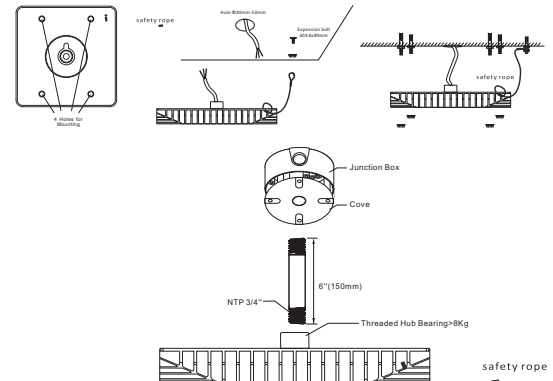

ORDERING INFORMATION

EX: FCP-U120-GS02-150-27V-40K-WH-SM

Series	Wattage (Lumens)	Input Voltage	Temperature	Sensor	Finish	Mount	Emergency
1a. FCP-U120-GS02	2a. 100 (100W; 13,000lm)	3a. 27V	5a. 40K (4000K)	6a. (Blank)	7a. WH	8a. SM	9a. (Blank).
1b. FCP-U120-GS03	2c. 150 (150W; 19,500lm)	3b. 48V	5b. 50K (5000K)	6b. MW		8b. MK	9b. EM.

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

- 3a. 120-277V input Voltage
- 6a. Leave Blank if not required
- 7a. White Finish
- 8a. Surface Mount (Standard)
- 9a. Leave Blank if not required
- 6b. Microwave Sensor
- 8b. Mounting Kit (Pendant)
- 9b. External Battery Pack (Field Install)

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes