

Project Name	
Project #	
Model #	
Type	



### STANDARD



### OPTIONAL



### ILLUMINATION

- Ultra-bright, energy efficient white LED emergency lighting.
- 4.5W (36 LEDs x 0.125 watts) per light pipe
- Adjustable high-performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "light pipe" lens for optimal light distribution.
- Long-life, energy efficient Red or Green LED exit sign illumination.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board/light pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.
- EZ snap out Chevron directional indicators.


### OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

### DIMENSIONS

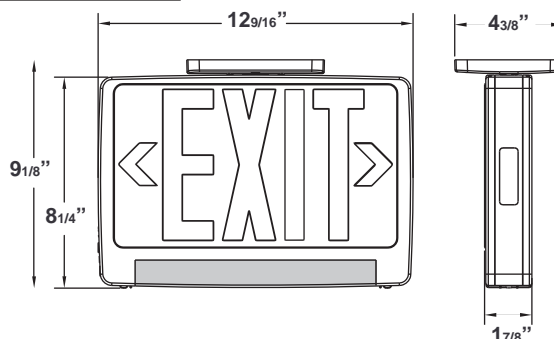

### ORDERING INFORMATION

Special voltage and SALIDA face plate options available. Check with your Best Lighting Representative.

Model	No. of faces	Letter	Housing		Options
CLPU	1 Single Face	R Red	W White	RC Remote Capacity (Standard)	SDT Self-diagnostics
	2 Universal Single/Double Face	G Green	B Black		

Sample Part Number: **FEX-CLPU-1-R-W**

### ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CLPU-RED/GREEN/RC	4.5	4.5	0.040	0.020