

Project Name	
Project #	
Model #	
Type	

FHB-U021-HB05 LED Series

FEATURES & SPECIFICATIONS

Intended Use: The HB05 series is an excellent choice for powerful and energy efficient high ceiling, indoor lighting. These luminaires use an advanced aluminum heat-sink for maximum quality lighting output with a long life. The finish product has a refined and modern look with efficient LED technology to keep energy costs down while still providing excellent and long lasting lighting.

Installation: These luminaires are ideal for architectural and commercial applications. It is designed for warehouses, workshops, factories, toll stations, supermarkets, exhibition halls, cold storage, gymnasiums, and other high ceiling locations.

IP Rating: IP65

Warranty: 5 years

Listing: UL, cULus



Lifetime: 50,000 hours

CRI: 82

Mounting Hardware Included: Hook

Fixture Body: Finished aluminum and acrylic lens.

Dimensions:

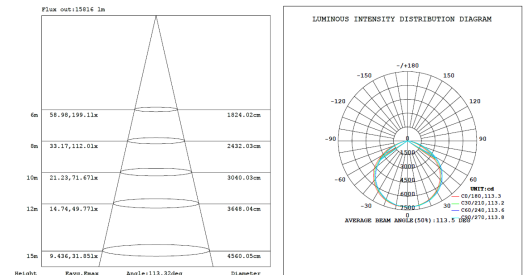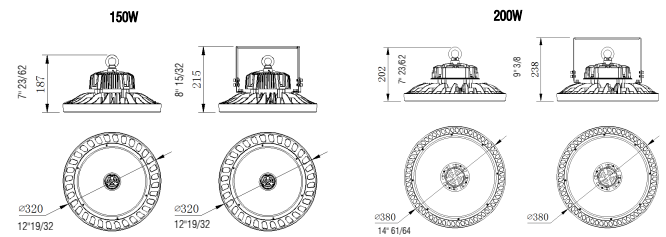

ORDERING INFORMATION

EX:FHB-U009-LRBH-200-27V-50K-A060-DCD-MW-EM

Series	Wattage (Lumens)	Input Voltage	Temperature	Beam Angle	Dimming	Sensor	Finish	Battery
1a. FHB-U009-LRBH	2a. 150 (150W; 19,500lm)	3a. 27V	4a. 40K (4000K)	5a. A110	6a. Blank	7a. (Blank)	8a. BLK	9a. (Blank)
	2b. 200 (200W; 28,000lm)		4b. 50K (5000K)		6b. DCD	7b. DL	8b. WHT	9b. EM
	2b. 240 (240W; 33,000lm)					7c. MW		

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs

1a. 120° Lens Standard
3a. 100-277V input voltage
5a. 110° Beam Angle

6b. 0-10V DC
7a. Leave blank if not required
7b. Day Light Harvest Sensor

7c. Microwave Sensor
8a. Black (Standard)
8b White (special order)

9a. Leave blank if not required
9b. 90 minute EM mode (special order)

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

1834 NW 21st STREET MIAMI, FL 33142 | PHONE – 786.420.3600 | FAX – 786.420.3602 | SPECTRASOL-US.COM