

Project Name	
Project #	
Model #	
Type	


FHB-U066-HB02 LED Series

FEATURES & SPECIFICATIONS

- Sealed die-casting profile for indoor and outdoor applications.
- Voltage is 120-277V&347-480V.
- Lumen output from 8800-24000lm with efficacy up to 131lm/W.
- Superior colour rendition index compared to HPS.
- Increase energy saving with bi-level Motion sensor.
- Replacing 250W MH and 400W MH.
- Operating temperature is -40°C to 55°C (-40°F to 131°F).
- UL/cUL and DLC premium qualified.
- Hook mount, pendant mount and surface mount available.

DIMENSION

unit: inch/mm

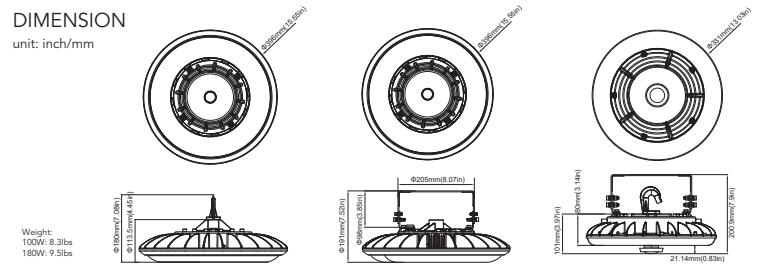

Weight:
100W: 8.3lbs
180W: 9.5lbs




EM MODULE

Housing
Die-cast aluminum housing with heat dissipating fins. Sealed design with silicone strip for use in wet locations.

Installation accessory
Available for both hook mounting and surface mounting with bracket. Bracket allows to adjust the direction to illuminate any area you need.

Photometry
High Bay Photometry formed from high efficiency LEDs and scattering diffuser.

Motion sensor
Optional motion sensor allows for security and energy saving.



ORDERING INFORMATION:

EX: FHB-U066-HB02-180-UNV-50K-H-M-W-EM

Series	Wattage (Lumens)	Input Voltage	Temperature	Mount	Sensor	Finish	Battery
1a. FHB-U066-HB02	2a. 067 (67W; 8,800lm)	3a. 27V**	4a. 40K (4000K)	5a. H	6a. (Blank)	7a. D	8a. (Blank)
	2b. 097 (97W; 13,000lm)	3b. 48V**	4b. 50K (5000K)	5b. P	6b. M	7b. B	8a. EM
	2c. 090 (90W; 13,000lm)			5b. S		7a. W	
	2d. 100 (100W; 14,000lm)						
	2e. 140 (140W; 20,500lm)						
	2c. 180 (180W; 24,000lm)						

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs

**67W, 97W, 100W, 180W Available in 27V Input Only, 90W & 140W Available in 48V Input Only

3a. 100-277V Input voltage 3b./347-480V Input voltage
5a. Hook 5b. Pendant 5c. Surface

6a. Leave Blank if no Dimming Required
6b. Motion Sensor

7a. Dark Bronze
7b. Black
7c. White (Standart)

8a. Leave blank if not required
8b. 90 minute EM mode @ 2,000lm

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

1834 NW 21st STREET MIAMI, FL 33142 | PHONE – 786.420.3600 | FAX – 786.420.3602 | SPECTRASOL-US.COM