

Project Name	
Project #	
Model #	
Type	

FHB-U066-HB05 LED Series

FEATURES & SPECIFICATIONS

- Efficacy higher than 145lm/W with high luminous flux output.
- 120 degree lens guarantees light intensity and light uniformity.
- Hook(default included) or Conduit pendant way for different applications.
- Optional motion sensor can be offered for maximizing energy savings.
- Optional adjustment dial allows the fixture to meet higher ambient temperature requirements.
- Operating temperature is -40 C (-40 F) -65 C (149 F) .
- Resistant to shock and vibration.

Warranty: 10 years

Listing: UL, DLC



Lifetime: 50,000 hours

CRI: 70

Mounting Hardware Included: Hook

Fixture Body: Finished aluminum and white acrylic lens.

Dimensions:

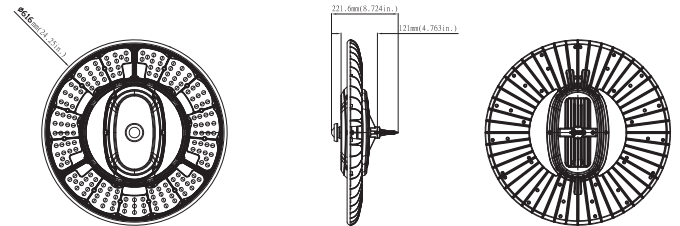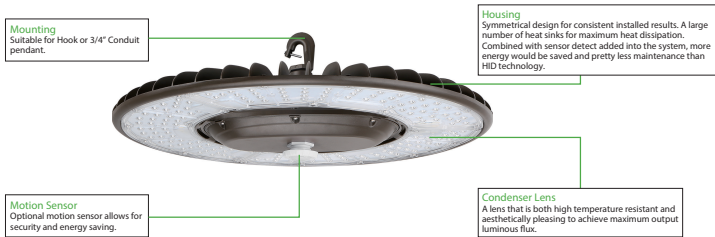

ORDERING INFORMATION

EX:FHB-U066-HB05-200-UNV-50K-A060-DCD-MW

Series	Wattage (Lumens)	Input Voltage	Temperature	Beam Angle	Dimming	Sensor	Finish	Battery
1a. FHB-U066-HB05	2a. 200 (200W; 29,000lm)	3a. 27V	4a. 40K (4000K)	5a. A060	6a. DCD	7a. (Blank)	8a. DB	9a. (Blank)
	2b. 250(250W; 36,000lm)	3b. 48V	4b. 50K (5000K)	5b. A090		7b. DL	8a. BK	9b. EM
	2c. 300(300W; 42,000lm)			5c. A120		7c. MW	8a. WH	
	2d. 350(350W; 50,000lm)							

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs

- | | | | | | | | | | | | |
|------------------------|----------------------------|--------------------|--------------------|---------------------|-------------------------|---------------------------------|------------------------------|----------------------|-----------|---------------------------------|---------------------------------------|
| 1a. 120° Lens Standard | 3a. 100-277V input voltage | 5a. 60° Beam Angle | 5b. 90° Beam Angle | 5c. 120° Beam Angle | 6a. 0-10V DC (Standard) | 7a. Leave blank if not required | 7b. Day Light Harvest Sensor | 7c. Microwave Sensor | 8a. White | 9a. Leave blank if not required | 9b. 90 minute EM mode (special order) |
|------------------------|----------------------------|--------------------|--------------------|---------------------|-------------------------|---------------------------------|------------------------------|----------------------|-----------|---------------------------------|---------------------------------------|

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

1834 NW 21st STREET MIAMI, FL 33142 | PHONE – 786.420.3600 | FAX – 786.420.3602 | SPECTRASOL-US.COM