

Project Name	
Project #	
Model #	
Type	

## PRODUCT DESCRIPTION

The suspended Up/down LED Luminaire is a commercial pendant lighting fixture utilizing an advanced LED optical system to achieve superior performance. The unique design is nearly transparent luminaire when off and excellent uniformity and efficiency when on, reaching 55% downlighting and 45% uplighting distribution, making the illusion of the light floating in mid-air, included UL Recognized constant current driver which support 0-10V dimming and step dimming, suitable for indoor lighting.

## PERFORMANCE SUMMARY

Efficacy: 105LPW

Delivered Light Output: 4200Lumens

Input Power: 40Watts

CRI: Ra>80

DLC CCT Options: 3500K/4000K/5000K

Input Voltage: 100-277V AC

Input current: 0.43A

THD:<20%

Power Factor: >0.9

Diver output: DC30-42V,0.88A

Standard Warranty: 5 Years

Standard Lifetime: Designed to L70 minimum 50,000 hours

Mounting: Suspended

Support to connect 10pcs panels together in 120V AC  
support to connect 20pcs panels together in 277V AC

Available 0-10v dimming and step dimming (100%,50%,10%-15%)

Signal Current: <2mA

Recommended Dimmers:DIVA-DVTV(LUTRON)

Dimensions: L 47.24" x W 7.87" x H 0.94"

## REGULATORY & VOLUNTARY QUALIFICATIONS



ETL Pending

DLC Pending

LM79 Report Pending

Damp rated Yes

## FPD-Up/Down 4' LED Luminaires

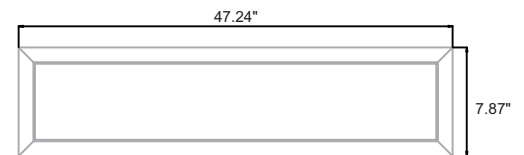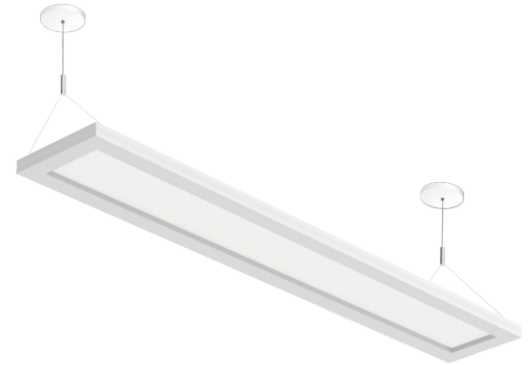

## ORDER INFORMATION

EXAMPLE:FPL-D4-040-UNV-40K-DM

Product category	Size	Fixture wattage	Input Voltage	Temperature	Dimming
FDP	D4=4'	040=40W	UNV= 100-277Vac	35=3500k 40=4000k 50=5000k	DM=0-10v