

Project Name	
Project #	
Model #	
Type	

FPL-U098-JHLED Series

FEATURES & SPECIFICATIONS


Intended Use: The FPL-JH Series ultra-thin form allows many design scenarios, including zero plenum. They are an excellent choice for offices, hospitals, classrooms, shopping centers and other commercial applications requiring low-lighting power density. These LED lights are a superior replacement to typical fluorescent lighting products because of their increased efficiency, longer life, and offer a flat panel elegance unmatched by any fluorescent products.

Installation: These luminaires are ideal for drop ceiling, suspension and surface mounting.

IP Rating: IP44; Protected from tools and small wires greater than 1 millimeter. Protected from water spray less than 60 degrees from vertical.

Warranty: 5 years

Listing: UL, UL-DLC 4.2

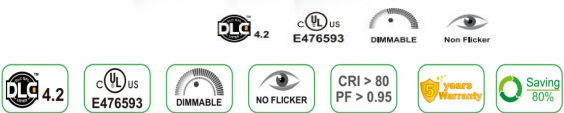


CRI: > 80

Fixture Body: Powder coated aluminum with a frosted polycarbonate lens.

Lifetime: 50,000 hours

Dimensions:

- JH24: L 2' x W 4' x H 7/16" (1212 x 603 x 12mm)
- JH22: L 2' x W 2' x H 7/16" (603 x 603 x 12mm)
- JH14: L 1' x W 4' x H 7/16" (300 x 1205 x 12mm)

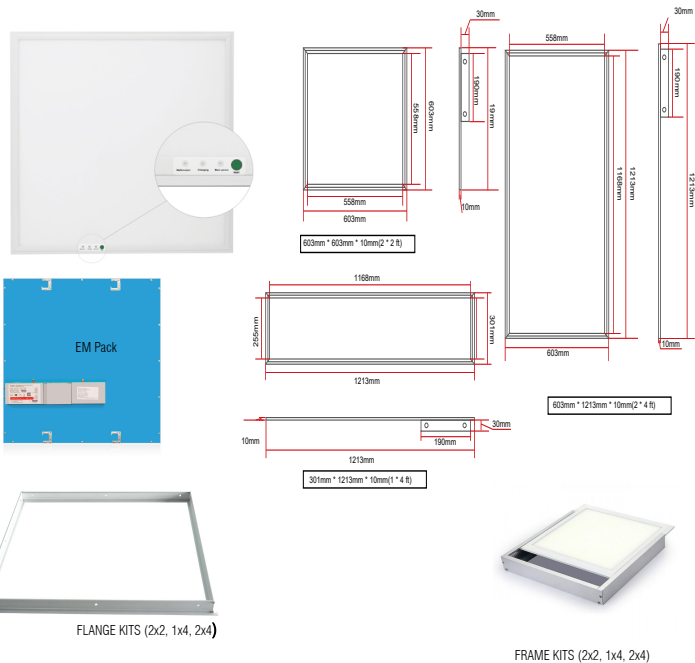

ORDERING INFORMATION

EX: FPL-U098-JH24-050-UNV-40K-WHT-DCD-EM

Series	Wattage (Lumens)	Input Voltage	Temperature	Finish	Dimming	Framing	EM Function
1a. FPL-U098-JH14	2a. 025 (25W; 3,250lm)	3a. 27V	4a. 30K (3000K)	5a. WHT	6b. DCD	7a. (Blank)	8a. (blank)
1b. FPL-U098-JH22	2b. 032 (32W; 4,160lm)		4b. 40K (4000K)	5b. SLV		7b. SK	8b. EM*
1a. FPL-U098-JH24	2c. 035 (35W; 4,550lm)		4c. 50K (5000K)			7c. FK	
	2d. 040 (40W; 5,200lm)						
	2e. 050 (50W; 6,500lm)						
	2f. 060 (60W; 7,800lm)						

Notes:
 If you do not see an option you would like please inquire directly and we will work to accommodate your needs.
 1a. 2'x2' option; available in 2a, 2c & 2d wattages 1b. 3a. 100-277 input voltage 6a. 0-10Vdc Dimming (Standard) 7c. FK Flange Kit
 1'x4' option; available in 2a & 2d wattages 1c. 2'x4' option; available in 2b, 2d, 2e & 2f wattages 5a. White; Powder coat 7a. Leave Blank if not Required (Drop Ceiling) 8a. Leave blank if no EM Function required
 5b. Silver; Powder coat 7b. SK Surface Mount Kit 8b. 90 minute emergency battery *(Factory Install)

All of the products and specifications can change without prior notice
 Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes