

Project Name	
Project #	
Model #	
Type	



FPL-PLC CCT ADJUSTABLE LED Series

FEATURES & SPECIFICATIONS

Intended Use: The FPL-PLC series ultra-thin form allows many design scenarios, including zero plenum. They are an excellent choice for offices, hospitals, classrooms, shopping centers and other commercial applications requiring low-lighting power density. These LED lights are a superior replacement to typical fluorescent lighting products because of their increased efficiency, longer life, and offer a flat panel elegance unmatched by any fluorescent products. With the added benefit of CCT Adjustable 3000K to 50000K & Power Adjustable via DIP Switch.

Installation: These luminaires are ideal for drop ceiling, suspension and surface mounting.


IP Rating: IP44; Protected from tools and small wires greater than 1 millimeter. Protected from water spray less than 60 degrees from vertical.

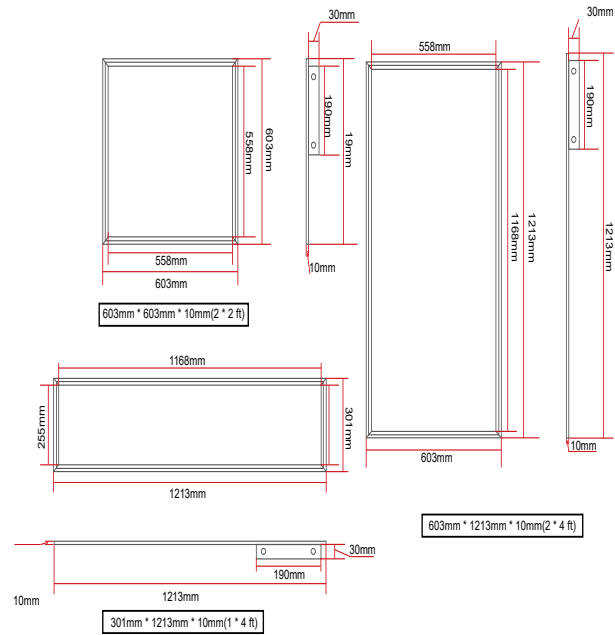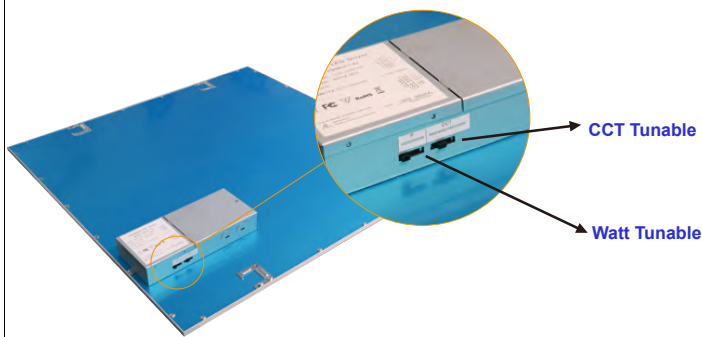

Surface Mount



Flange Kit

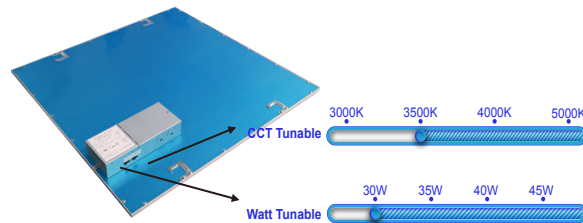

Item	N.W.	Carton Size(mm)	Qty	G.W.	Quantity loaded by 20 GP container	Quantity loaded by 40 GP container	Quantity loaded by 40 HQ container
2 x 2 FT	3.28kg/pc	650x650x80	2pcs/CTN	8.0kg/CTN	1836	3672	4320
2 x 4 FT	6.3kg/pc	1250x650x80	2pcs/CTN	14.1kg/CTN	904	1908	2280
1 x 4 FT	3.77kg/pc	1250x350x80	2pcs/CTN	9.0kg/CTN	1672	3496	4182



ORDERING INFORMATION

EX: FPL-U098-PLC24-2B-27V-XXK-WHT-DCD-SM

Series					Dimmable	M. Kits	Battery
1a. FPL-U098-PLC-22	2a. 20W/25W/30W/35W 2500lm/3125lm/3750lm/4375lm	3a. 27V	4a. XXK	5a. WHT	6a. DCD	7a. (Blank)	9a. (Blank)
1b. FPL-U098-PLC-14	2b. 35W/40W/45W/50W 4375lm/5000lm/5625lm/6250lm			5b. SLV		7b. SM	9b. EM
1c. FPL-U098-PLC-24						7c. FK	

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

- | | | | |
|------------------------------------|-----------------------------|---|---------------------------------|
| 1a. 2'x2' option; available in 2a. | 3a. 100-277 input voltage | 6a. 0-10V, Step Dimming | 9a. Leave Blank if not required |
| 1b. 1'x4' option; available in 2a | 4a. CCT Adjustable 3K to 5K | 7a. Leave blank if no Mounting Kit Required | 9b. 90Minute EM |
| 1c. 2'x4' option; available in 2b. | 5a. White; Powder coat | 7b. Surface Mount Kit | |
| | 5b. Silver; Powder coat | 7c. Flange Kit | |

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

1834 NW 21st STREET MIAMI, FL 33142 | PHONE – 786.420.3600 | FAX – 786.420.3602 | SPECTRASOL-US.COM