

Project Name	
Project #	
Model #	
Type	

FRD-U0850 BLR4 / BLR6 Series

FEATURES & SPECIFICATIONS

Description

Interior Dome Lights are designed to reduce targeting and improve design for better quality light. Gentle light comes out after reflected through reflector, to achieve soft lighting without seeing the light source, replaced direct lighting, like a moon hanging on the ceiling. Lights are available with LED Lighting technology and offer a stylish sleek appearance.

Features





Die cast aluminum body material with good heat dissipation High quality LED provides bright ambient lighting
 Higher reflection rate Reflector with nano powder sprayed on surface
 New construction is optional, no housing required Trimless design is available
 Use FT4 wire with high flame retardant grade
 Independent drive junction box, easy to replace
 Can be installed in 0.5" to 1.25" thick ceilings
 Safe isolated power supply
 Flicker free stable dimming, can be compatible with multi brand dimmers

CRI: >80

Lifetime: 50,000 hours minimum

Fixture Body: White powder coated trim with a nano powder reflector, Die Cast Aluminum body.

Dimensions:

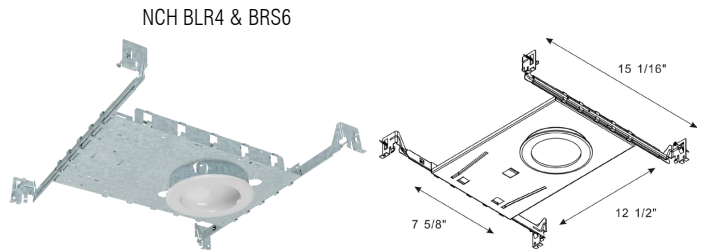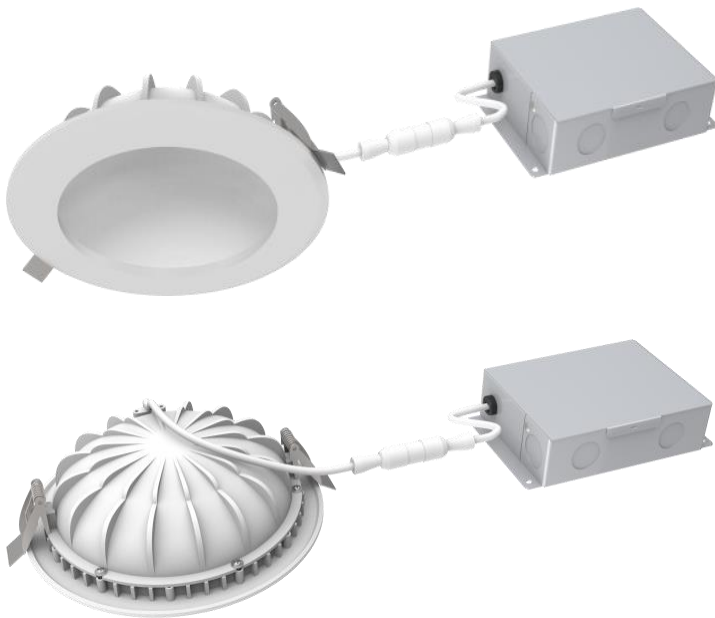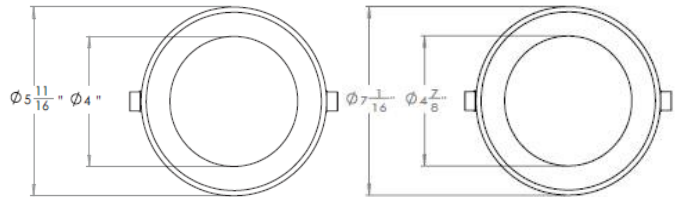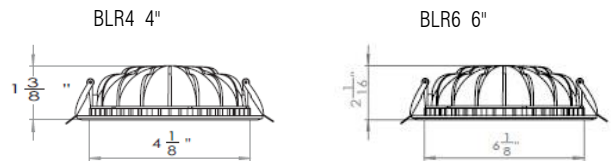

ORDERING INFORMATION

EX: FRD-BLR4-008-12V-40K-DM-NCH

Series	Wattage (Lumens)	Input Voltage	Temperature	Dimmable	Mounting Hardware	Battery
1a. FRD-U085-BLR4	2a. 008 (8W; 800lm)	3a. 12V	4a. 30K (3000K)	5a.(Blank)	6a. (Blank)	7a. (NA)
1b. FRD-U085-BLR6	2b. 014 (14W; 1,400lm)	3b. 27V	4b. 40K (4000K)	5a. DM	6b. NCH	
			4c. 50K (5000K)			

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

- | | | | | | |
|--------------|------------------------|--|---|------------------|-----------|
| 1a. 8W only | 3a. 120V input voltage | 5a. Leave blank if not dimming required. | 6a: leave blank if not housing required | 7a.White | 7b. Black |
| 1b. 14W only | 3b. 277V input voltage | 5b. Triac Dimming. | 6b: New Construction Housing | 7c. Satin Nickel | |

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes