

Project Name	
Project #	
Model #	
Type	

FRD-U062-CP LED Series

FEATURES & SPECIFICATIONS

Intended Use: The CP series is an excellent choice for sleek modern new construction applications in which both style and energy efficiency are required. They are an excellent choice for offices, hospitals, classrooms, shopping centers, and other commercial applications requiring low-lighting power density. These LED lights are a superior replacement to typical fluorescent lighting products because of their increased efficiency, longer life, and offer an elegance unmatched by any fluorescent products. These down lights come with DC Dimming.

Installation: These luminaries are ideal for new construction recessed lighting or retrofit projects (no housing).

Rating: Damp locations

Warranty: 5 years




Listings: UL, cUL, Energy Star, & FCC

CRI: >80

Lifetime: 50,000 hours

Fixture Body: White powder coated trim with a silver reflector, aluminum body, and a frosted acrylic lens.

Dimensions:

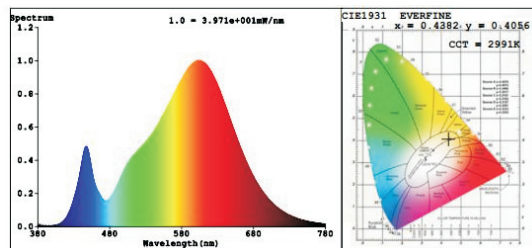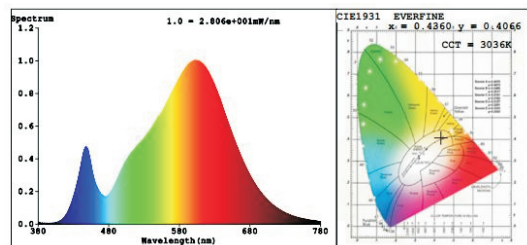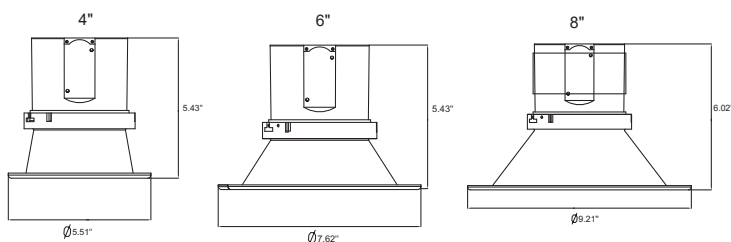

ORDERING INFORMATION

EX: FRD-U062-CP6-020-UNV-40K-DCD-NCH-EM

Series	Wattage (Lumens)	Input Voltage	Temperature	Dimmable	Mounting Hardware	Battery
1a. FRD-U066-CP4	2a. 015 (15W; 1,230lm)	3a. 27V	4a. 30K/40K/50K (Dip Swicht)	5a. DCD	6a. (Blank)	7a. (blank)
1a. FRD-U066-CP6	2b. 020(20W; 1,600lm)				6b. NCH	7b. EM
1a. FRD-U066-CP8						

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

3a. 100-347V input voltage

5a. 0-10V DC Dimming (UNV option only)

6a. Leave blank if no mounting hardware required (retrofit applications)

6b. New construction 6" housing

7a. Leave blank if no battery required

7b. 90 minute emergency battery (Field Install)

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes