

Project Name	
Project #	
Model #	
Type	

FSB-U066-AL04 LED Series

FEATURES & SPECIFICATIONS

Intended Use: The FSB-U066-AL04 series is an excellent choice for powerful and energy efficient site lighting. These fixtures are made with positive cooling technology to maximize the lifetime of the fixture. These fixtures are made with high quality Nichia chips to provide a long lasting, beautifully built fixture capable of meeting your site lighting needs. The wide range of wattages ensure that there's a lighting option for any application you have.

Installation: These luminaries are ideal for parking lots, tennis courts, basketball courts, soccer pitches and other outdoor area lighting.

Rating: IP65

Warranty: 5 years




Listings: UL & cUL, DLC 4.0

CRI: > 70

Fixture Body: Die-cast Aluminum

DIMENSION

unit: inch/mm

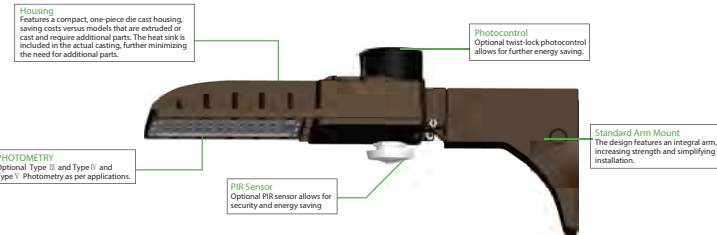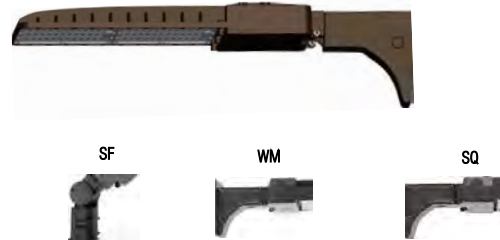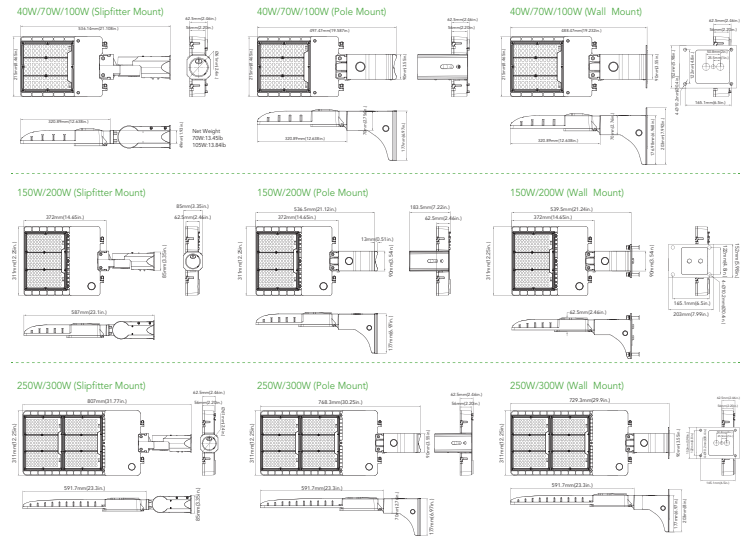

Item							
40W/70W/100W	0.3413	0.5929	0.7983	0.6826	1.0239	1.0499	1.0239
150W/200W	0.423	0.735	0.873	0.846	1.158	1.185	1.158
250W/300W	0.4759	0.7889	1.0581	0.9518	1.2648	1.3711	1.2648



EX: FSB-U066-AL04-300-UNV-DRB-SF-T3

Series	Wattage (Lumens)	Input Vol	Temperature	Options	Finish	Mounting	Shield	Distribution
1a. FSB-U066-AL04	2a. 040 (40W; 5,400lm)	3a. UNV	4a. 40K (4000K)	5a. (Blank)	6a. DRB	7a. SF	8a. (Blank)	9a. T3
	2b. 070 (70W; 9,400lm)	3b. UHV	4b. 50K (5000K)	5b. PC		7b. SQ	8b. BC	9b. T4
	2c. 100 (100W; 13,000lm)			5c. MS		7c. WM		9c. T5
	2d. 150 (150W; 21,000lm)							
	2e. 200 (200W; 27,000lm)							
	2f. 250 (250W; 35,000lm)							
	2g. 300 (300W; 42,000lm)							

Notes: *If you do not see an option you would like please inquire directly and we will work to accommodate your needs. *

- 3a. 100 - 277V input voltage
- 3b. 347 - 480V input voltage
- 5a. Leave Blank if not Required
- 5b. Photo Cell**
- 5c. Motion Sensor **
- 6a. Dark Bronze
- 7a. Slip Fitter
- 7b. Square Pole
- 7c. Wall Mount
- 8a. Leave Blank if not Required
- 8b. Back-light Control
- 9a. TYPE III Photometry
- 9b. TYPE IV Photometry
- 9c. TYPE V Photometry

**Specify Voltage 120-277V, 347V or 480V

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

All of the products and specifications can change without prior notice