

Project Name	
Project #	
Model #	
Type	

## FTF-U004-AT2X LED Series

### FEATURES & SPECIFICATIONS

**Intended Use:** The FTF-AT2XX series of 2'x2' and 2'x4' LED troffers is an elegant and energy efficient line of recessed fixtures. They are an excellent choice for offices, hospitals, classrooms, shopping centers and other commercial applications requiring low-lighting power density.

**Installation:** These luminaires are for recessed lighting and are perfect for offices.

**Rating:** Indoor use



**Warranty:** 5 years

**Listings:** UL

**CRI:** >80

**Housing:** White powder coated aluminum with a frosted polycarbonate lens.

**LED Life Time:** 100,000 hours

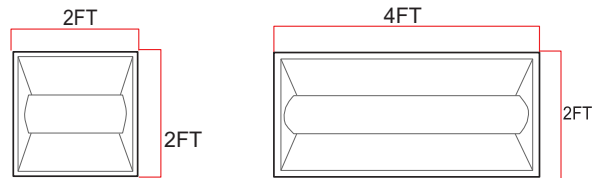

## ORDERING INFORMATION

**EX: FTF-AT224-042-UNV-40K-DCD-EM**

Series	Wattage (Lumens)	Input Voltage	Temperature	Dimmable	Battery
1a. FTF-U004-AT22	2a. 025 (25W; 3,250lm)	3a. 27V	4a. 30K (3000K)	5a. (Blank)	6a. (Blank)
1b. FTF-U004-AT24	2b. 036 (36W; 4,680lm)		4b. 35K (3500K)	5b. DCD	6b. EM
	2c. 050 (50W; 6,500lm)		4c. 40K (4000K)		
			4d. 50K (5000K)		

**Notes:**

\*If you do not see an option you would like please inquire directly and we will work to accommodate your needs.\*

- 1a. Only 25W and 36W available for 2x2 option
- 1b. Only 35W and 50W available for 2x4 option
- 3a. 100-277 input voltage
- 5a. Leave blank if dimming not required
- 5b. 0-10V DC Dimming
- 6a. Leave blank if no battery required
- 6b. 90 minute emergency battery (field install)

\*All of the products and specifications can change without prior notice\*

\*Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes\*