

Project Name	
Project #	
Model #	
Type	

FWP-U066-FCO2 LED Series

FEATURES & SPECIFICATIONS

DESCRIPTION

Available in two sizes, full cutoff wall pack is designed for perimeter illumination for safety, security and identity. Rugged cast-aluminum, corrosion-resistant housing with bronze polyester powder paint for lasting durability and long lifespan and secures the thermally conductive LED panel and electrical chamber 4 pcs-hole (top, bottom, and sides) make connection/disconnection safe and easy.

SPECIFICATION FEATURES

- Sealed die-casting profile for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and long life.
- Suitable for applications requiring 3G testing prescribed by ANSI C136.31.
- Light engines are available in standard 4000 K and 5000 K (70 CRI) configurations.
- Scalable Lumen Packages from 3,800 to 18,000 Lumens.
- Tempered UV coated flat lens provide outstanding performance, uniformity and glare control.

Electrical

- Universal 120-277 or 347-480 VAC input voltage.
- Greater than 0.9 power factor, less than 20% harmonic distortion, and is suitable for operation in -40°C to 45°C ambient environments.


Lifespan

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.


Warranty

- Five-year warranty.

Medium Size 27W&45W&70W

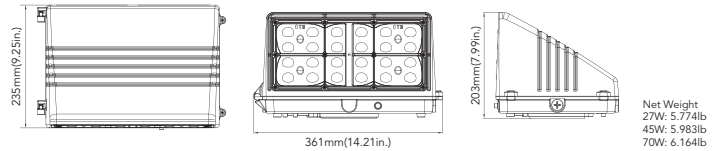


Large Size 90W&135W

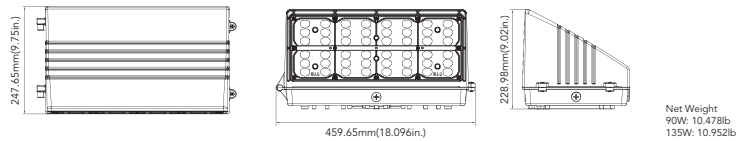

Large Size 90W&135W

Photocell
No. PC-JL-120-277V
USE: Photocell is field installed or pre-installed in factory by requesting

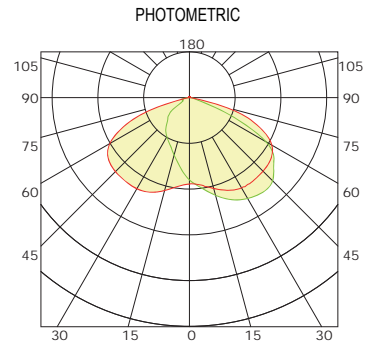

ORDERING INFORMATION

EX:FWP-FCL-090-UNV-50K-PHC-DBR-EM

Series	Wattage (Lumens)	Input Voltage	Temperature	Photocell	Finish	Emergency
1a. FWP-U066-FCOL	2a. 027 (27W; 3,800lm)	3a. 27V	4a. 40K (4000K)	5a. (Blank)	6b. DRB	7a. Blank
	2b. 045 (45W; 6,300lm)	3b. 48V	4b. 50K (5000K)	5b. PHC		7b. EM*
	2c. 070 (70W; 9,700lm)					
	2d. 090 (90W; 12,200lm)					
	2e. 135 (135W; 18,000lm)					

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

3a. 100-277V input voltage 5a. Leave blank if not required 6a. Dark Bronze 7a. Leave blank if not required
3b. 347-480V input voltage 5b. Photocell 7b. 90Min 8W, Factory installed EM Pack *Not Available in 135W Model

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes