

Project Name	
Project #	
Model #	
Type	

FWP-U066-P05 LED Series

FEATURES & SPECIFICATIONS

Intended Use: The FWP-P05 series is an excellent choice for powerful and energy efficient wall packs. These fixtures are made with high power chips and an aluminum body with PC Lens and a powder coating finish to provide a long lasting, beautifully built fixture capable of meeting your wall pack lighting needs. The wide range of wattages ensure that there's a lighting option for any application you have.

Installation: These luminaries are ideal for outdoor lighting and site lighting.

Rating: UL/cUL Wet Location


Warranty: 5 years

Listings: UL, cUL, DLC

View Angle: 120°

Fixture Body: Powder coated die-cast aluminum with UV Stabilized PC Lens.

Dimensions: (mm/inch)

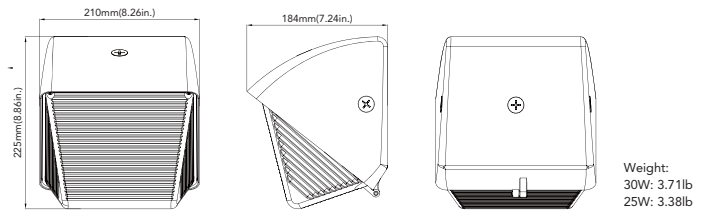

Housing
The one piece die-cast aluminum housing, saving costs versus models that are extruded or cast. Suitable for both indoor and outdoor application.

Lens
Polycarbonate optical lens with UV stabilizers do not exhibit yellowing and deformation


Photocell
Optional photocell allows for security and energy saving

1/2inch threaded hole
3pc hole can support wires coming out from the hole for easier wire connections

PHOTOMETRICS

U066-MWP05-030

Luminous Intensity Distribution Curve

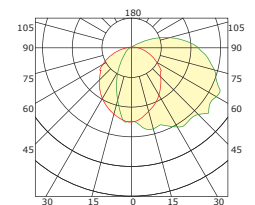

ORDERING INFORMATION

EX: FWP-MWP-P05-030-UNV-50K-BLK

Series	Wattage (Lumens)	Input Voltage	Temperature	Photocell	Finish
1a. FWP-U066-P05	2a. 025 (25W; 3,200lm)	3a. UNV	4a. 40K (4000K)	5a. (Blank)	6b. DRB
	2b. 030 (30W; 3,800lm)		4b. 50K (5000K)	5b. PHC	6c. BLK

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

3a. 100 - 277V input voltage

5b. Photocell

5a. Leave blank if no required

6a. Dark Bronze 6b. Black

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes