

Project Name	
Project #	
Model #	
Type	

FWP-U066-P08 LED Series

FEATURES & SPECIFICATIONS

Intended Use: The FWP-U066-P8 series is an excellent choice for powerful and energy efficient wall packs. These fixtures are made with high power chips and an aluminum body with PC Lens and a powder coating finish to provide a long lasting, beautifully built fixture capable of meeting your wall pack lighting needs. The wide range of wattages ensure that there's a lighting option for any application you have.

Installation: These luminaries are ideal for outdoor lighting and site lighting.

Rating: UL/cUL Wet Location


Warranty: 5 years

Listings: UL, cUL, DLC 4.0

View Angle: 120°

Fixture Body: Dark bronze powder coated die-cast aluminum with PC Lens.

Dimensions:

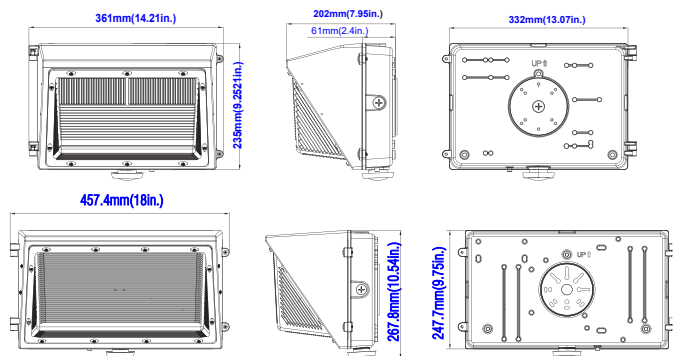

Housing
Suitable for both indoor and outdoor application, also suitable for J-BOX mounting and surface mounting.


Lens
Polycarbonate optical lens with UV stabilizers no yellow shading or deterioration over years

PIR Sensor
Optional PIR Sensor allows for security and energy saving

Photocell
Optional photocell allows for security and energy saving

1/2inch threaded hole
Three entries can support wires coming out from the hole for easier wire connections

Emergency Switch
8W 900lm 90min



ORDERING INFORMATION

EX: FWP-U066-P08-065-UNV-50K-PHC-DBR-EM

Series	Wattage (Lumens)	Input Voltage	Temperature	Photocell	Finish	Emergency
1a. FWP-U066-P08	2a. 030 (30W; 3,600lm)	3a. UNV	4a. 40K (4000K)	5a. (Blank)	6a. DRB	7a. (Blank)
	2b. 040 (40W; 5,100lm)	3b. HV	4b. 50K (5000K)	5b. PHC		7b. EM
	2c. 065 (65W; 7,900lm)					
	2d. 090 (90W; 10,900lm)					
	2e. 125 (125W; 14,500lm)					

Notes:
 If you do not see an option you would like please inquire directly and we will work to accommodate your needs.
 3a. 100-277V 50/60Hz Input Voltage 5a. Leave blank if not required 6a. Dark Bronze 7a. Leave blank if not required
 3b. 347-480V 50/60Hz Input Voltage (40W & 65W Only) 5b. Photocell 7b. 90Min 8W, Factory installed EM Pack

All of the products and specifications can change without prior notice
 Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes