

Project Name	
Project #	
Model #	
Type	


RFK-U044-CE00 Series

FEATURES & SPECIFICATIONS


- Driver On Board design
- All the products certificated by CUL,UL,Energy Star etc.
- Wet Location IP65, outdoor using
- Retrofit or install, easy to operate, can be replaced in 5 minutes.
- Low flicker and noise free
- Smooth TRIAC dimming feature and compatible with a wide variety of dimmers 100%-10%
- 50,000 hours lifespan



Product Dimension

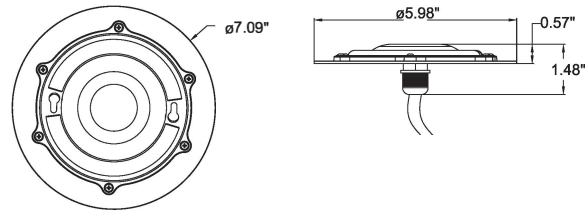

CEC T-24
UL file#E483573



ORDERING INFORMATION

EX: RFK-U020-200-UNV-50K-DCD-LB

Series	Wattage (Lumens)	Input Voltage	Temperature	Cover	Mounting	Dist TYPE
1a. RFK-U044-CE05	2a. 010 (10W; 900lm)	3a. 12V	4a. 27K (2700K)	6a. CL	7a. SM	8a. 120°
1b. RFK-U044-CE06	2b. 015 (15W; 1,350lm)		4b. 30K (3000K)			
1c. RFK-U044-CE07	2c. 025 (25W; 2,250lm)		4c. 40K (4000K)			
	2d. 030 (30W; 2,700lm)		4d. 50K (5000K)			
			4d. 60K (6000K)			

Notes:

*If you do not see an option you would like please inquire directly and we will work to accommodate your needs. *

3a. 120V input voltage 1a. 5" Available in 10W Only 6a.. Clear Cover 7b. Flat Plate 8a. 120° (Standard)
 1b. 6" Available in 15W & 25W
 1b. 7" Available in 30W Only

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

All of the products and specifications can change without prior notice