

Project Name	
Project #	
Model #	
Type	

RMR-16 WP Wet Location Semi-Recessed EM-Unit



STANDARD



OPTIONAL



ILLUMINATION

- Two fully adjustable, ultra-bright, round, 7.2W MR-16 halogen lamp heads with a fully gasketed enclosure and clear polycarbonate lens cover.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable Sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Wall mount via knockouts on the back of the housing.

HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in neutral gray or black finish.
- Fully-gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.


OPTIONS

- HTR: Optional internal heater for cold temperature applications.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations. (20°C – 40°C)

DIMENSIONS

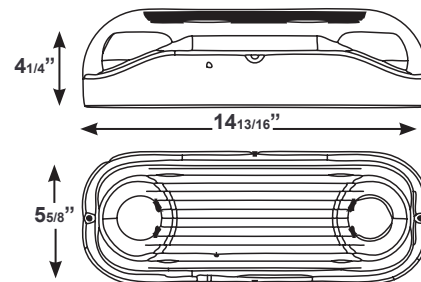

ORDERING INFORMATION

Sample Part Number: **RMR-16-WP**

Special Voltage options available.
Check with your Best Lighting representative.

Model	Housing Color	Options
RMR-16	Blank Gray B Black	WP Wet Location HTR Internal Heater USA Assembled in the USA

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
RMR-16-WP	6.0	6.2	0.053	0.025